

RES-XR6 Alliance 2U

21.5" Deep, Rear I/O Rugged Rackmount Server

- Up to 2 Intel® Xeon® Scalable Processors with 28 cores
- Up to 6TB DDR4 ECC Memory
- Up to 5 PCIe 3.0 cards
- MIL-STD: 810G, 901D, 167-1



Technical Specifications

Up to 2 Intel® Xeon® Scalable 8100/8200, 6100/6200, 5100/5200, 4100/4200, and 3100/3200 series processors

Up to 6TB addressable memory per processor socket

24 DIMM slots

Management and Operating System

iLO 5 Management Port

Windows® Server 2019: Essentials, Standard, Data Center

Windows® Server 2016: Essentials, Standard, Data Center

Windows® Server 2012 R2: Essentials, Standard

Data Center Microsoft Hyper-V Server: 2012 R2, 2016 & 2019

VMware® vSphere 6.0 U3, 6.5 U2 and 6.7 U1

ClearVM: 7.6 & 8.0

Red Hat® Enterprise Linux® (RHEL) 7.6 w/ Kbase

SUSE Linux Enterprise Server (SLES) 12 SP4 and 15 SP1 (includes Xen)

Expansion and Modular Maintainability

Up to 5 PCIe 3.0 x16 Full Length Full Height (FLFH)

Redundant Hot Pluggable Power Supplies

Power Supply Options

Single or Redundant 100/240 VAC, 800W

Single or Redundant 48 VDC, 800W

Environmental*

Operating

Temperature: 0°C to 50°C

Extended Temperature: 5°C to 95°C

Humidity: 8% to 95% (non-condensing)

Shock: 3 axis, 35g, 25ms

Vibration: 4.76Grms, 10Hz to 2000 Hz (SSD)

Non-Operating

Temperature: -30°C to 60°C

Humidity: 5% to 95% (non-condensing)

Additional Options

Slide Rails

Air Filters

Mechanical

Height: 2U or 3.5 inches (88.9mm)

Width: 17 inches (431.8mm)

Depth: 21.5 inches (546.1mm)

Weight (Typical)*: 18 pounds (8.16kg)

19" rackmount

* Mercury Systems designs all products to meet or exceed listed data sheet specifications. Some specifications including I/O profiles, weight, and thermal profiles are configuration dependent. Contact Mercury for information specific to your desired configuration requirements.

Mercury Systems is a leading commercial provider of secure sensor and safety-critical processing subsystems. Optimized for customer and mission success, Mercury's solutions power a wide variety of critical defense and intelligence programs.




Custom Expertise

For tailor-made systems with specific security and environmental requirements, email tms@rcy.com


Input/Output Versatility

Front View

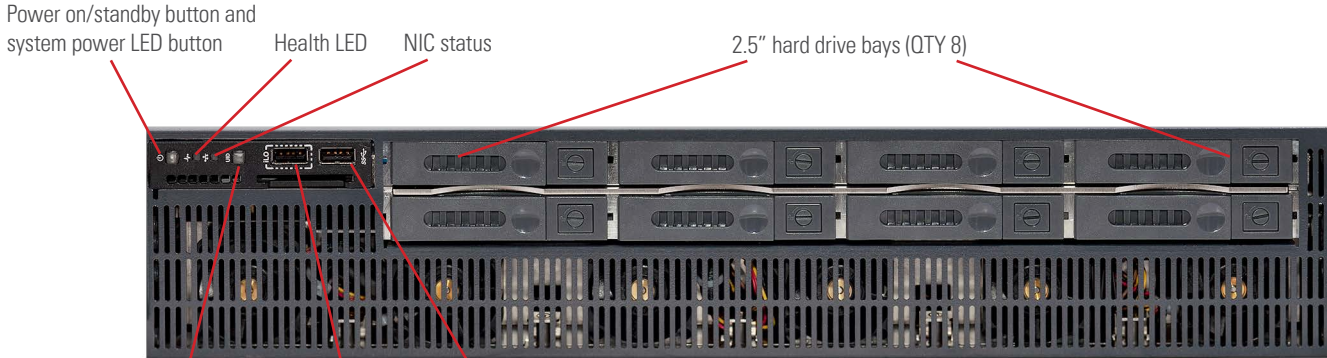

UID button iLO front service port USB 3.0

Rear View

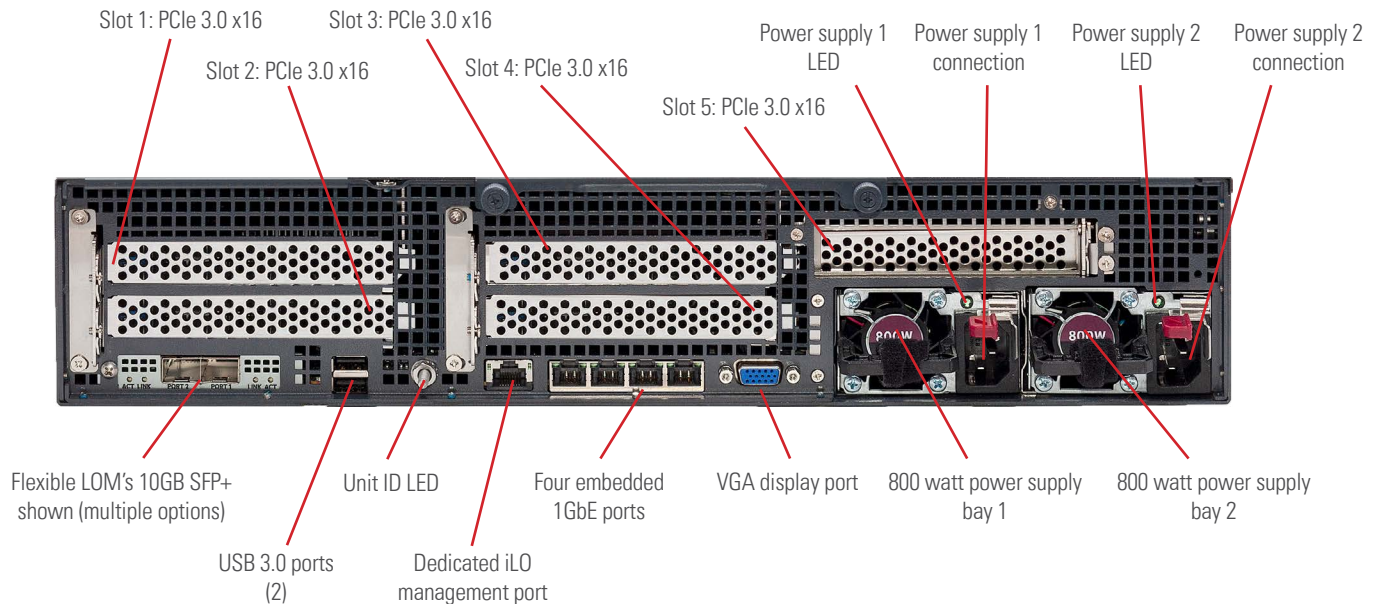

Innovation That Matters, and Mercury Systems are trademarks of Mercury Systems, Inc. Other product and company names mentioned may be trademarks and/or registered trademarks of their respective holders. Mercury Systems, Inc. believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

Copyright © 2020 Mercury Systems, Inc.

6578.00E-1218-DS-XR6Alliance2URIO

EXPID14882



INNOVATION THAT MATTERS™

MERCURY SYSTEMS

50 Minuteman Road • Andover, MA 01810 USA
(978) 967-1401 • Fax (978) 967-3330

MERCURY SYSTEMS INTERNATIONAL

Avenue Eugène-Lance 38 • PO Box 584
CH-1212 Grand Lancy 1 • Geneva, Switzerland
+41 022 884 5100